


STEEL BODY POWER PRESSES

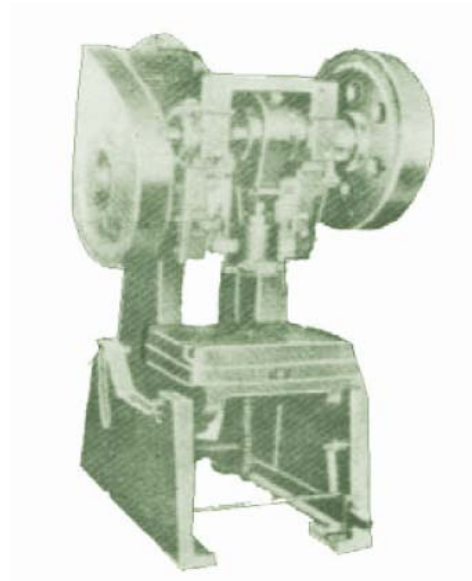

Geared, steel body power presses with adjustable stroke, AC 440/3/50 electric motor & starter.

CAPACITY IN TONS	3	5	10	10	20
CRANKSHAFT DIAMETER	38	51	60	60	76
STROKE ADJUSTMENT	25-Feb	25-Jun	25-Jun	Jun-51	13-51
HOLE IN RAM	19	25	25.4	25.4	32
HOLE IN BAD	20-Feb	63	76	76	83
LENGTH & WIDTH OF BED	203 152	305 178	381 255	381 255	508 305
DIST. BED TO RAM	127	153	205	205	280
FLYWHEEL DIAMETER	330	405	435	435	550
STROKE PER MINUTE	85	85	75	75	60
H.P. REQUIRED	0.5	0.5	1	1	2
WEIGHT APPROX.	150	275	500	500	975
CAPACITY IN TONS	20	30	30	50	50
CRANKSHAFT DIAMETER	76	83	83	105	105
STROKE ADJUSTMENT	13-76	13-63	13-76	13-76	13-102
HOLE IN RAM	32	38	38	38	38
HOLE IN BAD	83	89	89	127	127
LENGTH & WIDTH OF BED	508 305	558 356	558 356	750 520	750 520
DIST. BED TO RAM	280	292	292	406	406
FLYWHEEL DIAMETER	550	660	660	810	810
STROKE PER MINUTE	60	60	60	55	55
H.P. REQUIRED	2	3	3	5	5
WEIGHT APPROX.	975	1275	1275	2475	2475
CAPACITY IN TONS	75	100	150	260	250
CRANKSHAFT DIAMETER	121	134	152	158	165
STROKE ADJUSTMENT	115	127	152	158	165
HOLE IN RAM	45	51	57	63	63
HOLE IN BAD	127	178	191	216	229
LENGTH & WIDTH OF BED	863 596	914 635	965 685	1016 736	1067 778
DIST. BED TO RAM	483	483	495	519	544
FLYWHEEL DIAMETER	910	1016	1118	1150	1320
STROKE PER MINUTE	50	45	40	30	30
H.P. REQUIRED	7.5	10	15	20	25
WEIGHT APPROX	4000	5300	6400	9000	11500